


C800 series - Grade 3 - Cylindrical leverset

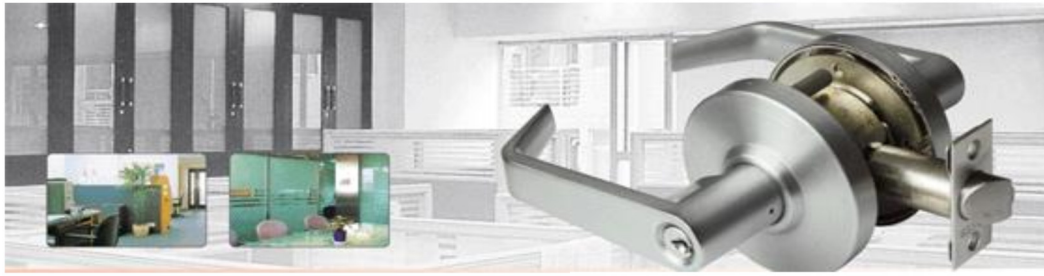

SPECIFICATIONS :

Exposed trim - Levers are made of zinc die casting, roses are made of stainless steel or brass

Keying - 5 pins tumbler SC1 keyway with three brass silver nickled plated keys, 6 pins are available for master keying or as option.

Housing : Wrought steel housing with chromated finish for better corrosion resistance.

Backset : universal 2-3/8"(60mm) back, and 2-3/4"(70mm) backset available.

Finish : PVD finish lasting 480 hours salt spray test and 96 hours for standard finish

Cycle passed - 200,000 cycle passed meets ANSI A156.2 grade 3

Door thickness : 30-50mm door thickness, option upto 55mm




C803-00-SN



C802-00-ORB

FINISH


CODE	AB	AC	PB	SB	ORB	PVD
BHMA	609	616	605	606	613	505
US	5	11	3	4	10B	11P

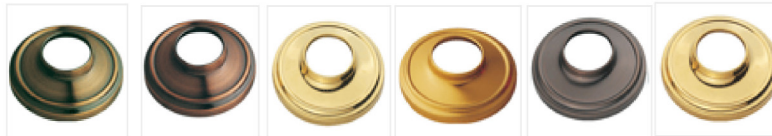

CODE	SS	PS	CP	SC	AN	SN
BHMA	630	632	625	626	620	619
US	32D	32	26	26D	15A	15



FUNCTION



00
Unlocked by key from outside when outer knob/lever is locked by turn-button in inside knob/lever

10
Turn-button locking. Unlocked from outside by turning emergency turn-button

30
Both knob/lever always unlocked

50
Unlocked by key from outside, inside knob/lever always free.

60
Lock or unlock by key outside, inside always free

MARCO POLO ARCHITECTURAL HARDWARE